Color Sheet-fed Digital Press

RICOH Pro C9500





Enhance revenue, reduce operational costs and open doors to new applications.

Discover the RICOH Pro C9500 a next-generation press for the next evolution of your business

If ever there was a digital color press tailor-made for the realities of our time yet also equipped to support the growth and potential of what lies ahead, the RICOH Pro C9500 is it. Building on a proven foundation, this new top-of-the-line system takes success to the next level with advanced technologies that drive automation and help you deliver high-quality, predictable results.

- Turbocharge productivity with a robust print controller designed for ease-of-use and automation
- Expand offerings with media support from 40 – 470 gsm and oversized options
- Realize consistent color and quality with built-in advanced technologies
- Minimize waste and improve customer satisfaction with precise front-to-back registration
- Increase your capacity with monthly volumes of up to 1,000,000 pages
- Reduce operator intervention with auto duplex/perfecting up to 400 gsm



Scalable, affordable and highly intelligent

The RICOH Pro C9500 addresses the most pressing challenges facing commercial printers, print service providers and in-plants. These challenges include how to overcome labor shortages and appeal to a new generation of press operators, how to evolve from offset to digital without compromise, how to achieve exceptional color quality even in the most demanding production environments, and how to grow into high-margin segments (including packaging and signage) and drive profitability despite shorter runs.

Relentless performance for remarkable results

You need tough and innovative presses to get the job done and help you expand into new applications and markets. The RICOH Pro C9500 goes the distance and never lets up. Benefit from superior speeds of up to 135 pages per minute*, the ability to replace paper and toner while in operation, an 18,100-sheet maximum paper capacity and Trained Customer Replaceable Units (TCRU) that empower your business to perform preventive maintenance without waiting on a technician.




Productivity Upgrade Kit, speed increases to 135 pages per minute.

Work smarter from end-to-end

Predictable and repeatable results from the first page to the last.

Utilize the new Fiery[®] N-70 Controller Digital Front End based on Fiery and Ricoh technology to get more jobs done in a day. Process larger and more complex files faster than ever.

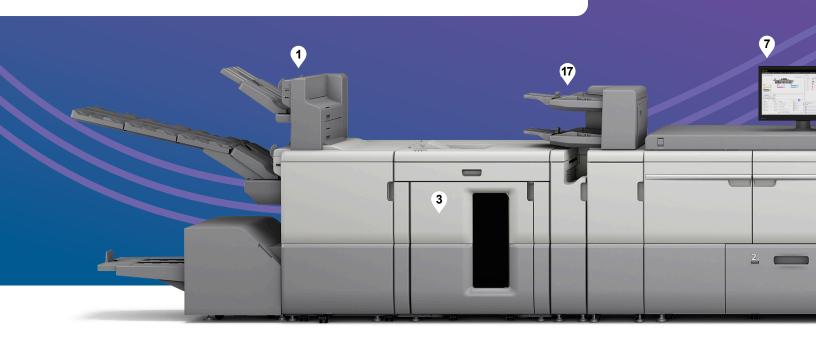

- 3,500-Sheet Booklet & Staple Finisher (SR5120)* Saddle-stitch booklets up to 30 sheets and staple up to 100 sheets quickly at sizes up to 13" × 19.2".
- Plockmatic Booklet Maker PBM 5035/5035S*° Create booklets up to 50 sheets of paper in-line or off-line with three-sided trimming and square fold. Supports up to 350 gsm coated or uncoated paper stocks.
- High-Capacity Stacker (SK5040)*

A 5,000 sheet stacker with a rollaway cart quickly moves large output volumes to offline binding or packing and shipping.

Perfect Binder (GB5010)*°

Glue and bind up to 200 sheets with three-edge trimming, including covers up to 300 gsm.

Six-Position Multi-Folding Unit (FD5030)*° Execute up to six types of folds to give your customers a wider range of finished documents. GBC StreamPunch[™] Plus & StreamWire*[°] Achieve professional quality with inline punching for media up to 300 gsm. Automate inline binding systems when creating twin-loop wire-bound booklets.

Full-Color Touch Screen Control Panel Transition between jobs effortlessly via fingertip control and animated guides from the postmounted 21.5" LCD.

Status Light Pole

Know the moment maintenance is required, even if you're away from the device.

VCSEL and Active Toner Density Control^o Create output with brilliant colors and smooth gradations for sharper text and more precise reproductions.

Oversize and Heavy Media Support° Handle more types of media, including up to 13" × 19" standard paper sizes, a 38" oversize option, and heavy media up to 173 lb. cover (470 gsm), and keep more jobs in-house.



Media Identification Unit°

Eliminate guesswork during print production prep work and easily associate media with the closest available match in your media library.

Paper Trays (Standard)°

With a total paper capacity of 4,400 sheets, you can print with fewer reloads. Increase capacity to 18,100 sheets with optional paper sources.

Active Tray Indicators

Find out which tray is currently being fed into the printer so you can refill other paper sources without interrupting the run.

Vacuum Feed Large Capacity Input Tray Type S14*

Ensure paper feeds run continuously with a three-belt air-blasting tool that handles coated papers up to 173 lb. cover (470 gsm).

Bridge Unit (BU5020)*

Extend print runs and minimize interruptions by bridging three 4,400 sheet trays.

Vacuum Feed LCIT (RT5150)*

4,400-sheet Vacuum Feed LCIT can handle paper sizes up to 13" × 19.2" and paper weights up to 173 lb. cover (470 gsm).

V Cover Interposer Tray (Cl5040)*

Feed pre-printed sheets for fast production of front and back covers.

Plockmatic High Capacity Interposer[°]

Use for automatically inserting pre-printed offset prints, front covers, back covers or tabs into your finishing workflow.

🖗 Multi Bypass Tray (BY5020)*

Feed up to 500 sheets of specialty stocks, including sizes up to 49.6" and expand what you can offer customers.

Best-in-class media support so you can expand your business

Produce everything from flyers, direct mail and promotional materials to packaging, catalogs, photo books, POP and much more. The RICOH Pro C9500 makes it easy to take on more creative applications and expand your business with support for thin to thick paper, and synthetic and specialty substrates. Superior mixed media handling keeps jobs running continuously, avoiding production slowdowns.

Inline finishing helps you save on outsourcing

Adding inline finishing solutions will help you save on outsourcing, gain more control over the outcome and impress customers. Confidently finish high-class saddle-stitched booklets, ring-bound books, and folded direct mail — efficiently and affordably. Whether you need to collate, bind or trim on simple or complex jobs, we'll help you automate everything so there are fewer steps, fewer manual errors and faster turnaround times.



Enter markets where color accuracy and pristine pages are essential

Produce photo-like images with crisp text and fine lines, sheet after sheet, with 2400 × 4800 dpi resolution. Groundbreaking and world-first technologies like Auto Color Diagnosis and Image Quality Monitoring take operator subjectivity out of the equation. Internal scanners automatically detect imperfections and instantly adjust to maintain consistency and avoid costly reprints. Gloss Control is another exciting new feature exclusive to the RICOH Pro C9500. It enables operators of all levels to achieve high-end, offset-like quality while accelerating your digital migration strategy.

A simpli ied user experience

Intuitive and highly intelligent automated features on the RICOH Pro C9500 empower a new generation of operators to succeed, regardless of skill level. Move jobs through the workflow while leveraging the system's most advanced capabilities. An embedded NBC (New Based Controller) — new for this model and specifically designed for complex graphic communication workflows — can support a highly synchronized remote diagnosis system and enable remote service.

Services that deliver new pathways to success

With Ricoh, your experience will be smooth from the start. Gain the support of an exceptional and knowledgeable professional services team who brings real-world experience to every engagement. From operator training to finishing solutions, business development and G7 certification, tap into Ricoh as your single-source partner to help you get the most out of your investment and develop a deeper customer base.

Operate your shop more productively. Service your customers more profitably.



Find out more at takealookatricohproduction.com/pro-c9500

RICOH Pro C9500

SYSTEM SPECIFICATIONS

Hardware Specifications

| Hardware Specifications | | | |
|--|--|--|--|
| Process | 4-drum dry electrostatic transfer | | |
| Fusing Engine Speed | system with internal transfer belt Oil-less belt-fusing method Pro C9500 – 115 ppm (8.5" × 11") Pro C9500 – 135 ppm (8.5" × 11") with Productivity Upgrade Kit | | |
| Max Monthly Volume | 1,000K | | |
| Duty Cycle | 1,750K | | |
| Laser Resolution | 2400 × 4800 dpi VCSEL | | |
| Warm-Up Time | Less than 540 sec. | | |
| Limitless Paper Supply | Supported | | |
| Paper Size | 13" × 19.2" – 13" × 49.6" | | |
| Maximum Printable | (when using Oversize Tray Option) 12.7" x 18.9" – 12.7" × 49.4" | | |
| Area | (when using Oversize Tray Option) | | |
| Paper Weight | Trays $1 - 4$: 40 - 470 gsm | | |
| i uper vreight | Duplex: 40 – 470 gsm | | |
| | Trays 5 – 8: 52 – 400 gsm | | |
| | Bypass Tray: 52 – 216 gsm | | |
| Paper Type | Uncoated Paper, Coated Paper (gloss | | |
| | and matte), Recycled Paper, | | |
| | Pre-printed, Letterhead, Pre-punched, | | |
| | Tab Stock, Textured Paper, Label | | |
| Paper Capacity | Paper, Carbonless Paper Trays 1 – 8: 2,200 sheets per tray | | |
| Faper Capacity | Bypass Tray: 500 sheets | | |
| | Total Standard Capacity: 4,400 sheets | | |
| | Total Optional Capacity: 18,100 sheets | | |
| Power Source | 208-240V, less than 60A (30A × 2), | | |
| | 50/60 Hz | | |
| Max. Power | Less than 9,000W | | |
| Consumption | Dec 00500, 00 0114/6 (| | |
| Typical Electricity Consumption (TEC)* | Pro C9500: 39.3kWh/week Pro C9500: 36.2kWh/week | | |
| 1 () | | | |
| *Typical Electricity Consumption by ENERGY STAR® program | | | |
| ENERGY STAR | Certified | | |
| EPEAT | Silver (N-70 Controller) | | |
| Dimensions (W × D × H) | 99.2" × 39" × 59" | | |
| | Height: 73.6" when including status pole | | |
| Weight | Less than 2,373 lb. | | |
| | 2000 4.411 2,010 10. | | |

Printer Controllers

Fiery Controller N-70 Fiery System Version Fiery FS500 Pro Configuration External 32GB RAM (4GB x 8) Memory Dual Intel® Xeon 12-core processor SSD Boot Drive for OS and Fiery software + 2 x 2TB HDD CPU HDD Operating System Windows 10 IoT Enterprise 2019

Accessories

| Vacuum Feed Large Capacity Tray (LCIT RT5150) (Max 3 units per system) | | | Letter Fold-in/Print outside, Letter Fold-in/Print outside, Letter Fold-out | |
|--|----------------------------|--|---|--|
| | Paper Capacity | 4,400 sheets (2,200 sheets x 2 Trays) | Paper Size Single Sheet | Z folding: 8.5" × 11" – 12" × 18"; Half |
| | Paper Size Paper Weight | 3.94" × 5.5" – 13" × 19.2" Trays 3 – 4: 40 – 470 gsm | | folding: 8.5" × 11" – 13" × 19.2"; Letter folding: 8.5" × 11" – 12" × 18"; Double |
| | i aper weight | Trays 5 – 8: 40 – 400 gsm | | Parallel folding: 8.5" × 11" – 12" × 18"; |
| | Dimensions (W x D x H) | | | Gate folding: 8.5" × 11" – 12" × 18" |
| | Weight | 507 lbs. | Multiple Sheets Mode | Half folding: 8.5" × 11" – 13" × 19.2"; |
| Vacuum Feed Oversize Tray Type S9 | | | Letter Fold-in: 8.5" × 11" – 12" × 18"; Letter Fold-out: 8.5" × 11" – 8.5" × 14" | |
| | Paper Capacity | 730 sheets | Paper Weight | |
| | Paper Size | 8.27" × 16.54" – 13" × 27.5" | Single Sheet Mode | 64 – 105 gsm |
| | Paper Weight | 52 – 400 gsm Width of LCIT RT5120 | Multiple Sheets Mode Dimensions (W x D x H) | 64 – 80 gsm 18.5" × 28.7" × 39.4" |
| | | will extend to 50.8" | Weight | 203 lbs. |
| Extension Vacuum Food Dannar Shoot Tray Tuna S14 | | Plockmatic High Capaci | ty Interneser (HCI3500) | |
| Extension Vacuum Feed Banner Sheet Tray Type S14 Paper Capacity 500 sheets | | Paper Capacity | 3,500 sheets (1,750 sheets × 2 Trays) | |
| | Paper Size | 8.27" × 16.54" - 13" × 38" | Paper Weight | 65 – 350 gsm |
| | Paper Weight | 52.3 - 470.0 gsm (16.54" - 19.2") | Paper Size Dimensions (W × D × H) | 4.72" × 8.27" – 13" × 26" 47.2" × 28.7" × 43" |
| | | 52.3 – 300.0 gsm (19.3" – 27.5") 63.1 – 300.0 gsm (27.6" – 38") | Weight | 551 lbs. |
| | | | - | |

Multi Bypass Tray Unit (BY5020) Paper Capacity

Paper Size

Paper Weight

| 500 sheets |
|----------------------------------|
| 3.94" × 5.5" – 13" × 19.2" |
| Maximum paper size extends up to |
| 13" × 27.5" by adding the |
| optional Multi Bypass |
| Sheet Tray Type S9 |
| 52 – 216 gsm |
| |

Ricoh Canada Inc., 100-5560 Explorer Drive, Mississauga, ON L4W 5M3, 1-888-742-6417

RICOH imagine. change.

www.ricoh.ca



2,000 sheets

172 lbs.

35 4" × 26 8" × 41 8" (width extends to max 55")

150 – 470 gsm 8.5" × 11" (LEF) – 13" × 49.6"

EPEAT Silver r

Plockmatic MPS - Oversize Sheet Stacker

Paper Capacity

Paper Weight

Paper Size Dimensions (W × D × H)

Weight

298 lbs 3,500-Sheet Booklet Finisher with 100-Sheet Stapler (SR5120) Lower Shift Tray: 2,500 sheets Upper Shift Tray: 1,000 sheets Paper Capacity Lower Shift Tray: 52 – 470 gsm Upper Shift Tray: 52 – 350 gsm Paper Weight Optional 2/3 hole Saddle Stitch Staple Weight Range 7.2" × 10.2" – 13" × 19.2" Paper Weight 52 – 350 gsm 52 – 80 gsm up to 30 sheets/120 pages 39.2" × 28.7" × 55.7" Dimensions (W x D x H) Weight 353 lbs. Booklet Trimmer (TR5050) One Side Edge Up to 30 sheets/120 pages 7.2" × 10.2" – 13" × 19.2" Trimming Type Trimming Capacity Paper Size Stack Capacity Limitless Stack Up to 60 sets Supported 43.9" × 23.3" × 21.9" Tab Stock Dimensions (W × D × H) Weight 166 lbs. High Capacity Stacker (SK5040) Paper Capacity 5,000 sheets; Proof tray: Additional 250 sheets Paper Weight 52 – 470 gsm Standard and Optional additional carts Rollaway Cart available 35.4" × 28.7" × 39.8" Dimensions (W × D × H) CMYK Toners Stacker: 264 lbs.; Rollaway cart: 33 lbs. FD5030 Multi-Folding Unit Folding Type Single Sheet Mode Z-Fold, Half-Fold/Print inside, Half-Fold/Print outside, Letter Fold-in/Print inside, Letter Fold-in/Print outside, Letter Fold-out Half-Fold/Print inside, Half-Fold/Print Multiple Sheets Mode outside, Letter Fold-in/Print inside, Letter Fold-in/Print outside, etter Fold-out

400 sheets (200 sheets x 2 Trays) 5.5" × 8.5" – 13" × 19.2" 52 – 350 gsm

Lower Shift Tray: 3,500 sheets Upper Shift Tray: 1,000 sheets Lower Shift Tray: 52 – 470 gsm

Upper Shift Tray: 52 - 350 gsm

Supported

13" × 28 7" × 50 8"

Optional 2/3 hole 39.2" × 28.7" × 55.7"

Optional

110 lbs.

4.500-Sheet Finisher with 100-Sheet Stapler (SR5110)

Cover Interposer Tray (CI5040)

Paper Capacity Paper Size Paper Weight

Paper Capacity

Paper Weight

Double Feed Detection

Dimensions (W × D × H)

Dimensions (W x D x H)

Air Assist

Weight

Punch

Weight

Punch

Weight

Weight

Weight

Paper Size

Waste Toner Bottle TCRU Program Letter Fold-out Z folding: $8.5^{"} \times 11^{"} - 12^{"} \times 18^{"}$; Half folding: $8.5^{"} \times 11^{"} - 13^{"} \times 19.2^{"}$; Letter folding: $8.5^{"} \times 11^{"} - 12^{"} \times 18^{"}$; Double Parallel folding: $8.5^{"} \times 11^{"} - 12^{"} \times 18^{"}$; Gate folding: $8.5^{"} \times 11^{"} - 12^{"} \times 18^{"}$; Half folding: $8.5^{"} \times 11^{"} - 13^{"} \times 19.2^{"}$; Letter Fold-out Letter Fold-in: 8.5" × 11" – 12" × 18"; Letter Fold-out: 8.5" × 11" – 8.5" × 14" 64 – 105 gsm 64 – 80 gsm 18.5" × 28.7" × 39.4"

2 - 35 sheets - 80 gsm Set Size Dimensions (W x D x H) 55.9" × 35.4" × 27.6 Weight 297 lbs. Ontional Trim Module Book Fold Module Cover Feeder, Rotate, Crease Trimmer Plockmatic Booklet Maker PBM 5035/5035S Staple: 8.11" × 8.27" – 12.6" × 24.4" Stitch: 4.27" × 8.27" – 12.6" × 24.4" Paper Size 18 lb. Bond to 130 lb. Cover (dependent Paper Weight on paper type and quality) Min Set: 1 sheet of 20 lb. Bond Book Thickness Max Finished Book: 0.393" (approx 200 pages 20 lb. Bond) Max Set: 0.137" or 0.196" (approx 35 sheets and 50 sheets of 20 lb. Bond) GBC StreamPunch Plus 5.5" × 8.5" , 8.5" x 11", 8.5" x 14", 11" × 17", 12" × 18" Punched Paper Sizes Punched Media 75 – 300 gsm Tab Punching "Two-Up" Punching Supported Supported 17.5" × 28.7" × 39.4" Dimensions (W × D × H) 220 lbs.
 GBC StreamWire (GBC StreamPunch Plus is required)

 Paper Sizes
 8.5" × 11" (LEF)

 Paper Weight
 75 - 300 gsm

 Number of Loops
 8.5" × 11" (LEF) - 32 loops
 StreamWire Supply Black, White or Silver Up to 30, 50, 60, 70 or 80 Sheets Supported 34" × 38" × 34" Dimensions (W × D × H) 500 lbs. Additional Accessories Cover Interposer Tray CI5030, Perfect Binder GB5010, RPIP Interface Option, Plockmatic LCT 3500 Oversize Tray, Auto Color Diagnosis Unit Type A (includes Image Quality Monitor) Consumables Black yield: 59.8K prints/bottle; CMY yield: 60.5K prints/bottle* Yield: 220K prints/bottle* *Based on 8.75% coverage (LT) Supported Workflow Solutions Supported RICOH ProcessDirector[®]. RICOH TotalFlow[™] Producer. RICOH TotalFlow Prep, RICOH TotalFlow Production Manager, RICOH TotalFlow BatchBuilder[®], RICOH @Remote, DigitalStoreFront[®], CGS/ORIS Lynx & Evaluate, Color Profiler Suite, EFI Fiery®Graphic Arts Package Premium Edition, DirectSmile®. EFI Fiery Central, Objectif Lune Specifications are subject to change without notice. Contact Ricoh for a list of certified media.

 Plockmatic Booklet Maker (PBM 350e)

 Paper Size
 8.5" × 11" - 12" × 18"

 Paper Weight
 64 - 300 gsm

2020.3. Ricoh Canada Inc. All rights reserved. Ricoh and the Ricoh logo® are registered trademarks of Ricoh Company, Ltd. All other trademarks are the property of their respective owners. The content of this document, and the appearance features and specifications of Ricoh products and services are subject to change from time to time without notice. Products are shown with optional features. While care has been taken to ensure the accuracy of this information. Ricoh makes no representation or warranties about the accuracy, completeness or adequacy of the information contained herein, and shall not be liable for any errors or omissions in these materials. Actual results will vary depending upon use of the products and services, and the conditions and factors affecting performance. The only warranties for Ricoh products and services are as set forth in the express warranty statements accompanying them.